

## Light Commercial

### General Features

- High Ceiling Applications
- Comfortable Airflow
- Water Drainage Pump
- 3 Dimensional Blade for quiet operation
- Flexible Installation
- Easy Maintenance
- Microcomputer Control
- Wireless Controller, Optional wired Controller

### TU30HKI/TU30H3O



### Unit Performance:

<i>Cooling:</i>	
Capacity (Min-Rated-Max, Btu/h)	8,800-28,200-31,400
SEER	17
EER	10.4
<i>Heating:</i>	
Capacity (Min-Rated-Max, Btu/h)	8,200-31,200-33,600
HSPF	9
COP (W/W)	3.68

\*\*\*\*

### Unit Specification

Refrigerant Type	R410A
Refrigerant Charge (oz)	84.67
ODU Sound Pressure (dB(A))	58
IDU Sound Pressure (dB(A))	49/45/40
ODU Net Weight (lbs)	158.8
IDU Net Weight (lbs)	70.6
Dehumidifying (Pint/h)	3

### Fan

ODU / IDU Type	Axial-flow/Centrifugal
Quantity (ODU + IDU)	1+1
Motor/Drive	Direct Drive
ODU Max Air Flow Rate (CFM)	2350
IDU Air Flow Rate (CFM)	880



### Compressor

Cooling Operation Ambient temp. Range	0~115 °F
Heating Operation Ambient temp. Range	0~75 °F
Compressor Type	Inverter Rotary
Fan Motor Power Output (HP)	1/6 x 1
Crankcase Heater	Yes

### Electrical Specification

Power Supply	208-230V / 60Hz
Communications Wire Size(ODU/IDU)	AWG 10/17
MOP (A)	40
MCA (A)	24
Cooling Rated Amps (A)	19.95
Heating Rated Amps (A)	20.97
Compressor RLA (A)	18
Indoor Fan Motor Full Load Amp (A)	0.9
Outdoor Fan Motor Full Load Amp (A)	1.5
Nominal Cooling Power Input (kW)	2.7
Nominal Heating Power Input (kW)	2.5

### Piping

Liquid Line (in, OD)	3/8
Gas Line (in, OD)	5/8
Additional Refrigerant (oz./ft.)	0.6
Max Pipe Length (ft.)	98.4
Piping Length (no add'l refrigerant, ft.)	25
Max Elevation (ft.)	49.2

AHRI certification Ref #


Job Name:

Date:


System Reference No.:

Engineer Signature:

## Cooling Performance F / %


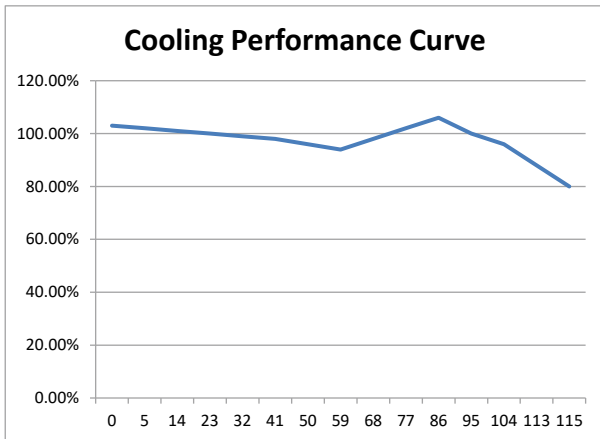


## Heating Performance F / %

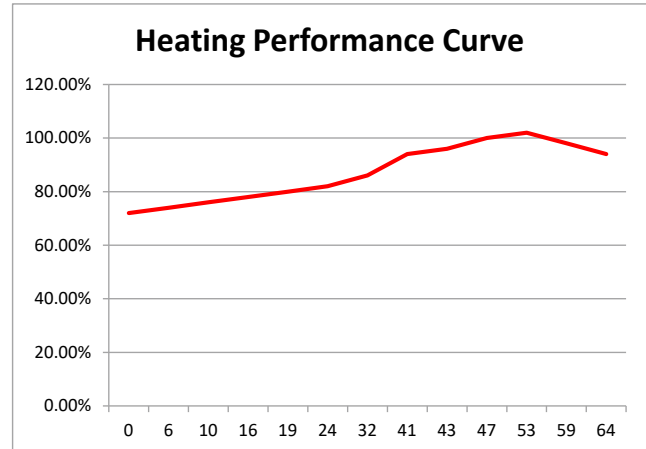

## Outline Dimension Diagram

	mm	(inch)
A	950	(37-3/8)
B	840	(33-1/8)
C	780	(30-3/4)
D	680	(26-3/4)
E	160	(6-1/4)
F	320	(12-5/8)
G	917	(36-1/8)
H	215	(8-1/2)
I	993	(39-1/8)

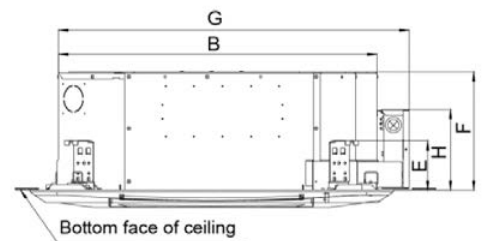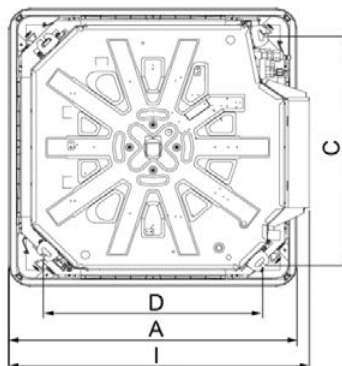

A	980	(38-5/8)
B	427	(16-3/4)
C	790	(31-1/8)
D	610	(24)
E	395	(15-1/2)

