

VRF Indoor

Indoor VRF SYSTEM FEATURES

- * Strong And Balanced Airflow
- * Ultra-Low Noise Operation
- * Intelligent Drainage
- * DC inverter Motor
- * Protection Function
- * Condensate Pump


TVRF-IE2WC18KHP



Specifications		Model Name
Unit Type		TVRF-IE2WC18KHP
Cooling Capacity	Btu/h	18,000
Heating Capacity	Btu/h	20,000
External Dimensions (WxHxD)	In.	47 1/5 x 20 1/2 x 13 2/5
	mm	340 x 1443 x 630
Net Weight	Lbs. / Kg	95/43
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.055
Power Heating Consumption	kW	0.055
Current Cooling	A	0.6
Current Heating	A	0.6
Minimum Circuit Ampacity (MCA)	A	1
Maximum Overcurrent Protection (MOCP)	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	3/8 - 9.52
	Gas (Low Pressure)	5/8 - 15.9
Sound Pressure Level	dB(A)	35/33/31
Fan		
Type x Quantity		Centrifugal×3
Airflow Rate	CFM	490/355/312
Motor		
Motor Type x Quantity		BLDC×1
Motor Output	kW	0.09
Refrigerant		R410A
Coil Type		Fenestrate plain film --hydrophilic film
Unit Color		silver

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Outline Dimension Diagram

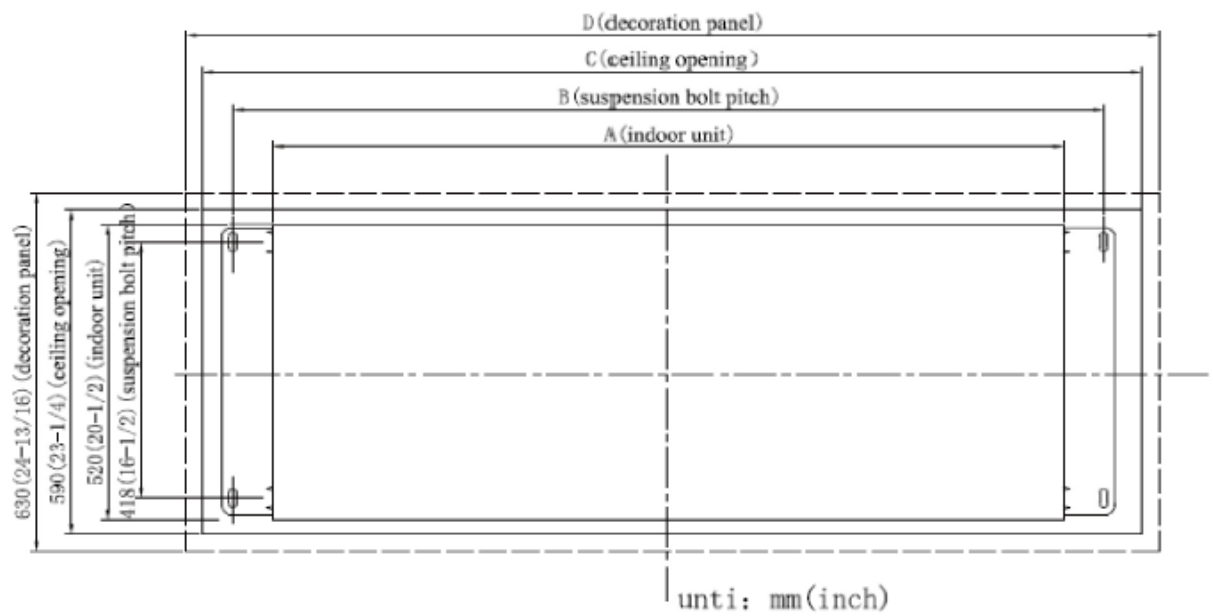

	A	B	C	D
mm	1200	1252	1403	1443
inch	47 1/4	49 1/4	55 1/4	56 3/4