

## VRF Indoor

### Indoor VRF SYSTEM FEATURES

- \* Strong And Balanced Airflow
- \* Ultra-Low Noise Operation
- \* Intelligent Drainage
- \* DC inverter Motor
- \* Protection Function
- \* Condensate Pump


### TVRF-IE2WC24KHP



Specifications		Model Name
Unit Type		TVRF-IE2WC24KHP
Cooling Capacity	Btu/h	24,000
Heating Capacity	Btu/h	27,000
External Dimensions (WxHxD)	In.	47 1/5 x 20 1/2 x 13 2/5
	mm	340 x 1443 x 630
Net Weight	Lbs. / Kg	101/46
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.091
Power Heating Consumption	kW	0.091
Current Cooling	A	0.7
Current Heating	A	0.7
Minimum Circuit Ampacity (MCA)	A	1
Maximum Overcurrent Protection (MC)	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	3/8 - 9.52
	Gas (Low Pressure)	5/8 - 15.9
Sound Pressure Level	dB(A)	39/37/35
<b>Fan</b>		
Type x Quantity		Centrifugal×3
Airflow Rate	CFM	650/483/448
<b>Motor</b>		
Motor Type x Quantity		BLDC×1
Motor Output	kW	0.09
Refrigerant		R410A
Coil Type		Fenestrate plain film --hydrophilic film
Unit Color		silver

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

## Outline Dimension Diagram

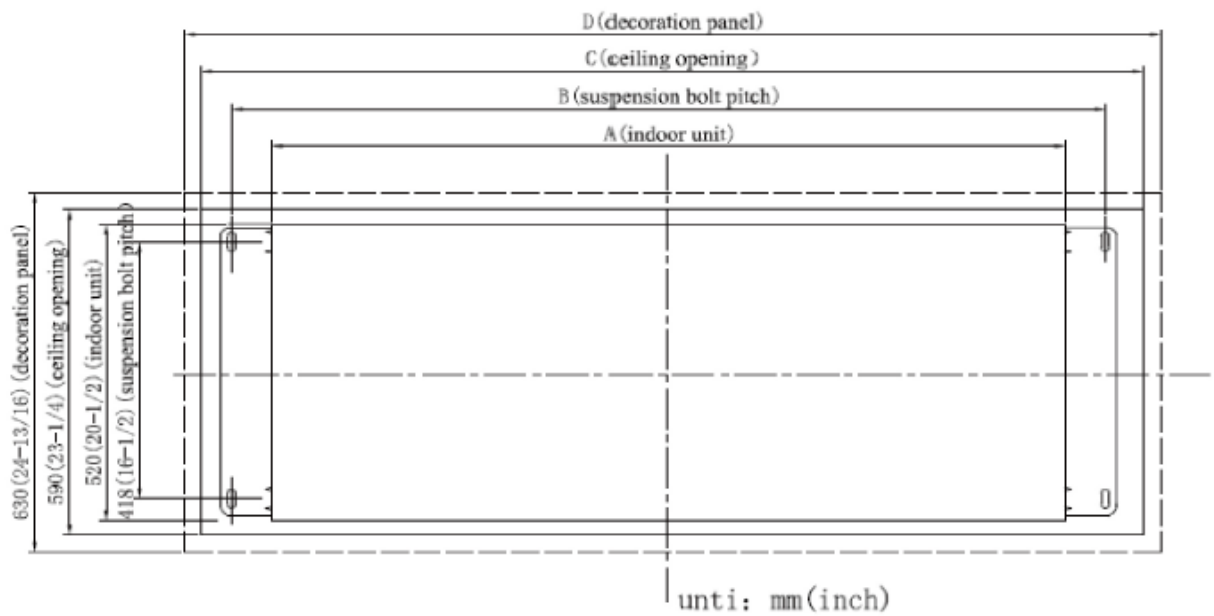

	A	B	C	D
mm	1200	1252	1403	1443
inch	47 1/4	49 1/4	55 1/4	56 3/4

