

VRF Indoor

TVRF-IELESPD12KHP


Indoor VRF SYSTEM FEATURES

- Low Static Pressure
- Intelligent Drainage Device
- Convenient Installation
- Protection Functions




Specifications		Model Name
Unit Type		TVRF-IELESPD12KHP
Cooling Capacity	Btu/h	12,000
Heating Capacity	Btu/h	13,500
External Dimensions (WxHxD)	In.	27-1/2 x 24-1/4 x 7-7/8
	mm	700 x 615 x 200
Net Weight	Lbs. / Kg	51/23
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.043
Power Heating Consumption	kW	0.043
Current Cooling	A	0.3
Current Heating	A	0.3
Minimum Circuit Ampacity (MCA)	A	3.15
Max Overcurrent Protection (MOCP) Fuse	A	6
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	1/4 - 6.35
	Gas (Low Pressure)	1/2 - 12.7
Sound Pressure Level	dB(A)	32/30/27
Fan		
Type x Quantity		Centrifugal x 2
Airflow Rate	CFM	325/265/205
Motor		
Motor Type x Quantity		Direct Drive x 1
Motor Output	kW	0.06
Refrigerant		R410A
Coil Type		internal groove tube

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

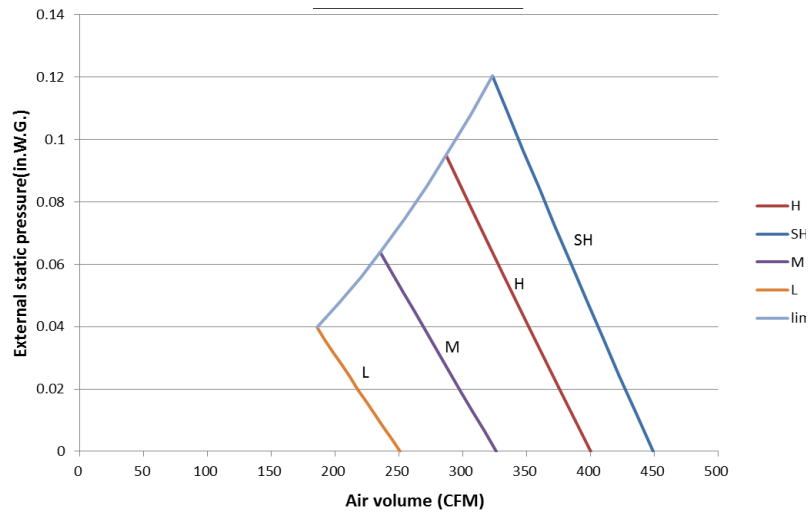

Outline Dimension Diagram

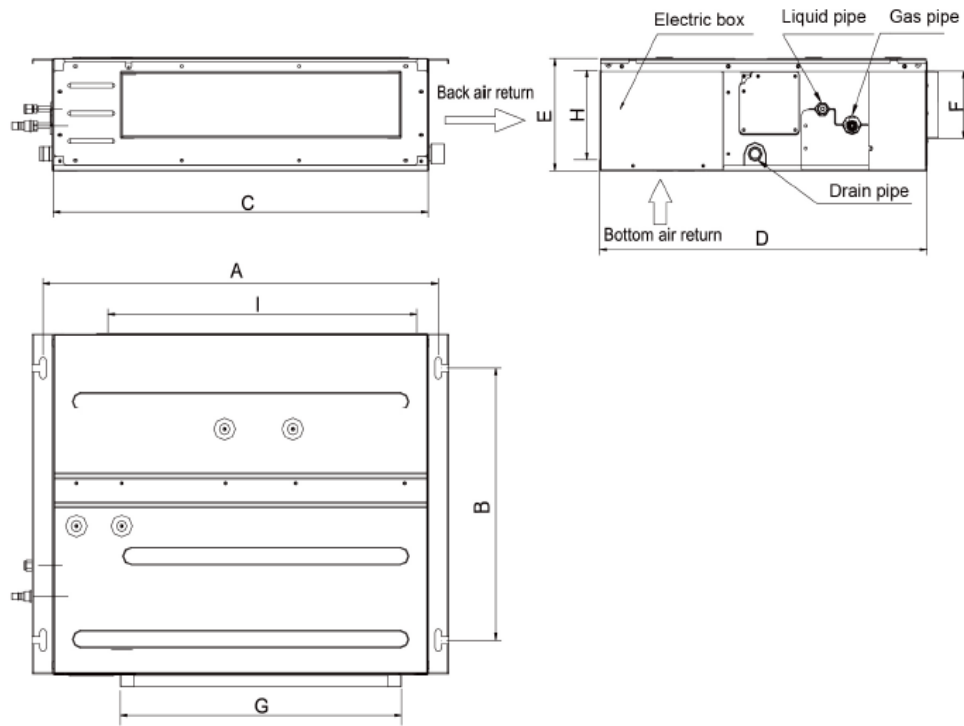

	A	B	C	D	E
mm	742	491	700	615	200
inch	29 1/4	19 3/8	27 1/2	24 1/4	7 7/8
	F	G	H	I	
mm	121	528	161	580	
inch	4 3/4	20 3/4	6 3/8	22 7/8	

