

VRF Indoor

Indoor VRF SYSTEM FEATURES


- Low Static Pressure
- Intelligent Drainage Device
- Convenient Installation
- Protection Functions

TVRF-IELESPD18KHP




Specifications		Model Name
Unit Type		TVRF-IELESPD18KHP
Cooling Capacity	Btu/h	18,000
Heating Capacity	Btu/h	20,000
External Dimensions (WxHxD)	In.	43-1/4 x 24-1/4 x 7-7/8
	mm	1100 x 615 x 200
Net Weight	Lbs. / Kg	69/31
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.099
Power Heating Consumption	kW	0.099
Current Cooling	A	0.7
Current Heating	A	0.7
Minimum Circuit Ampacity (MCA)	A	3.15
Max Overcurrent Protection (MOCP) Fuse	A	6
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	3/8 - 9.52
	Gas (Low Pressure)	5/8 - 15.9
Sound Pressure Level	dB(A)	35/33/30
Fan		
Type x Quantity		Centrifugal x 4
Airflow Rate	CFM	590/470/355
Motor		
Motor Type x Quantity		Direct Drive x 1
Motor Output	kW	0.06
Refrigerant		R410A
Coil Type		internal groove tube

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

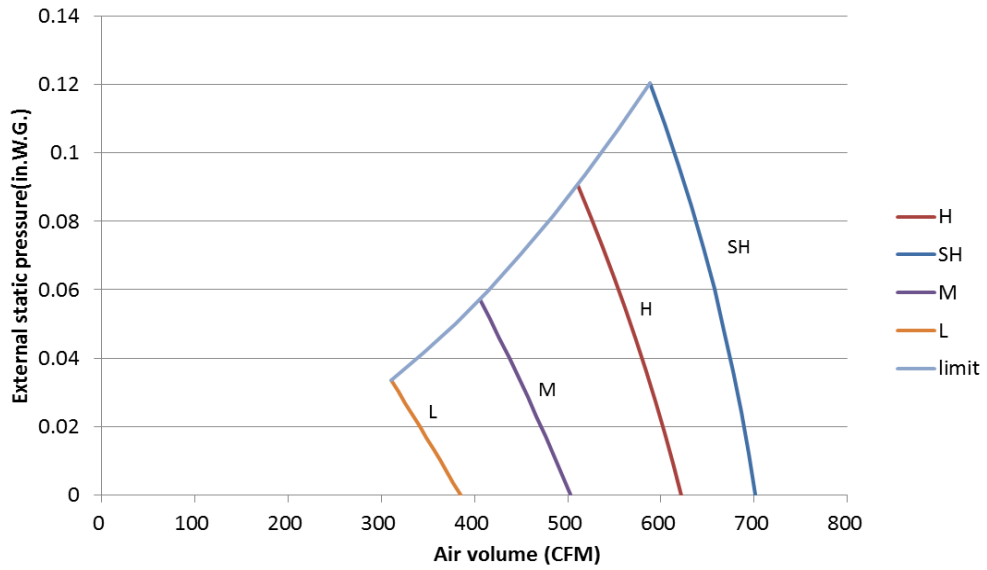

Outline Dimension Diagram

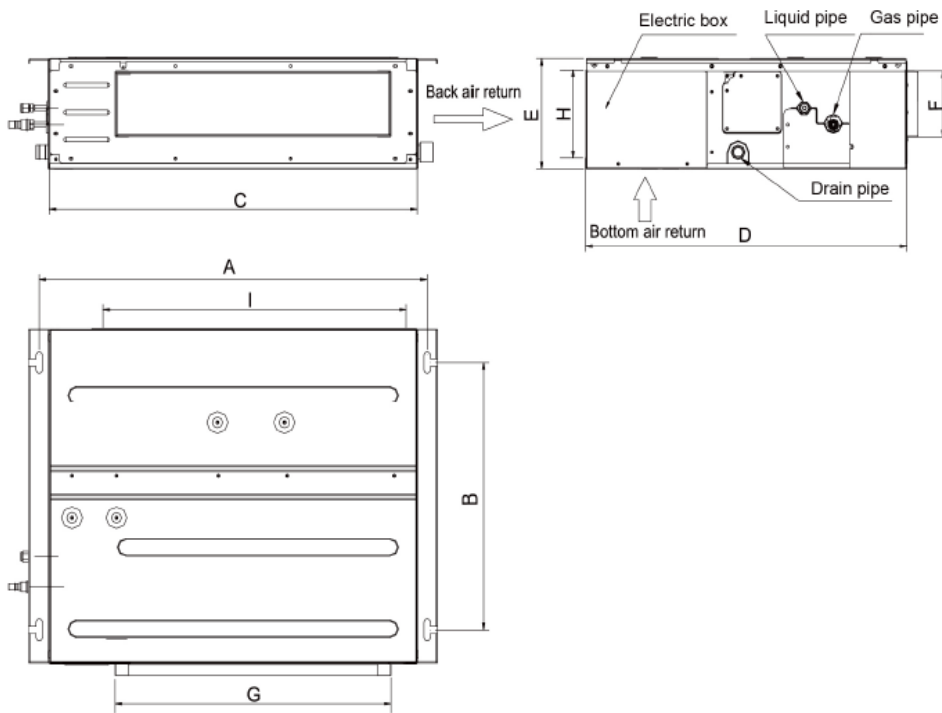

	A	B	C	D	E
mm	1142	491	1100	615	200
inch	45	19 3/8	43 1/4	24 1/4	7 7/8
	F	G	H	I	
mm	121	928	161	980	
inch	4 3/4	36 1/2	6 3/8	38 5/8	

