

VRF Indoor

TVRF-IEWM18KHP

Indoor VRF SYSTEM FEATURES


- * Comfortable And Balanced Airflow, Up&Down Air Outlet
- * Cold Air Prevention Design.
- * Triple Defenders For Better Purification.
- * Multiple Protections



Specifications		Model Name
Unit Type		TVRF-IEWM18KHP
Cooling Capacity	Btu/h	18,000
Heating Capacity	Btu/h	20,000
External Dimensions (WxHxD)	In.	37 x 11-3/4 x 7-7/8
	mm	940 x 298 x 200
Net Weight	Lbs. / Kg	28/12.5
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	5.20
Power Heating Consumption	kW	5.80
Current Cooling	A	0.21
Current Heating	A	0.21
Minimum Circuit Ampacity (MCA)	A	1
Max. Overcurrent Protection (MOCP) Fuse	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	1/4 - 6.35
	Gas (Low Pressure)	1/2 - 12.7
Sound Pressure Level	dB(A)	44
<u>Fan</u>		
Type x Quantity		Cross-flow x 1
Airflow Rate	CFM	370
<u>Motor</u>		
Motor Type x Quantity		PG x 1
Motor Output	kW	0.02
Refrigerant		R410A
Coil Type		Direct Drive
Unit Color		white

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

Outline Dimension Diagram

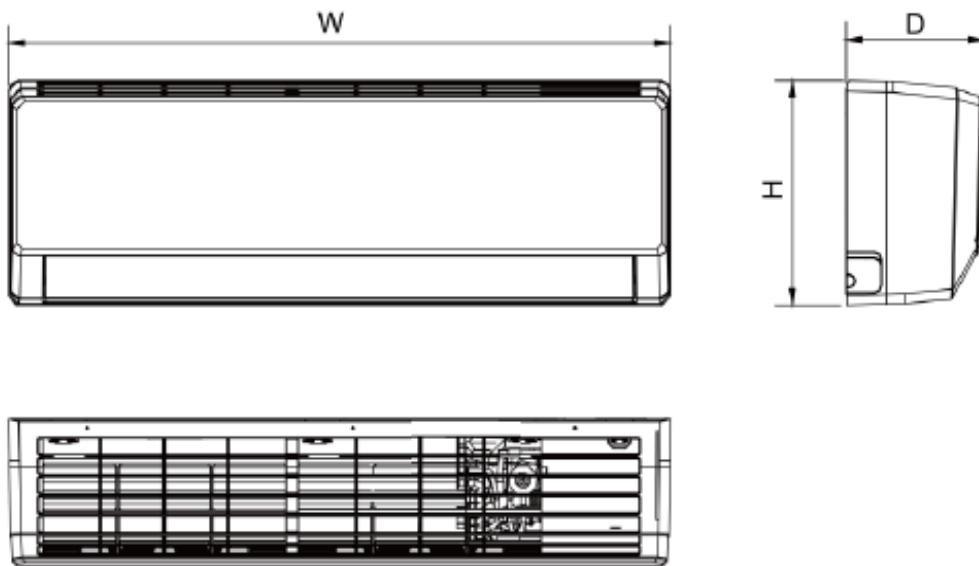

		W	H	D
TVRF- IEWM18KHP	mm	940	298	200
	inch	37	11 3/4	7 7/8

