

## VRF Indoor

### Indoor VRF SYSTEM FEATURES

- \* Strong And Balanced Airflow
- \* Ultra-Low Noise Operation
- \* Intelligent Drainage
- \* DC inverter Motor
- \* Protection Function




**TVRF-IE4WC24KHP**

Specifications		Model Name
Unit Type		TVRF-IE4WC24KHP
Cooling Capacity	Btu/h	24,000
Heating Capacity	Btu/h	27,000
External Dimensions (WxHxD)	In.	33-1/8 x 33-1/8 x 9-1/2
	mm	840 x 840 x 240
Net Weight	Lbs. / Kg	58/26.5
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.068
Power Heating Consumption	kW	0.068
Current Cooling	A	0.5
Current Heating	A	0.5
Minimum Circuit Ampacity (MCA)	A	1
Max. Overcurrent Protection (MOCP) Fuse	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	3/8 - 9.52
	Gas (Low Pressure)	5/8 - 15.9
Sound Pressure Level	dB(A)	38/36/33
<b>Fan</b>		
Type x Quantity		Centrifugal×1
Airflow Rate	CFM	695/590/470
<b>Motor</b>		
Motor Type x Quantity		BLDC×1
Motor Output	kW	0.045
Refrigerant		R410A
Coil Type		Fenestrate plain film --hydrophilic film
Unit Color		Silver

Job Name:		Date:	
System Reference No.:			
Engineer Signature:			

## Outline Dimension Diagram

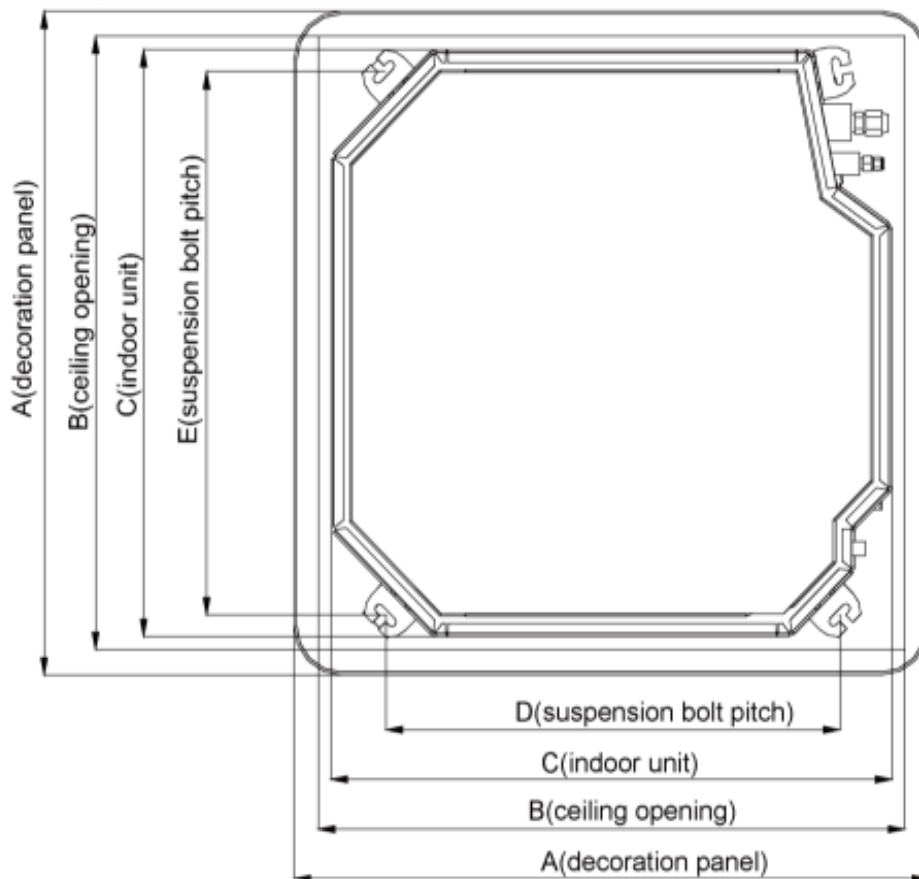

	A	B	C	D	E
mm	950	890	840	680	780
inch	37 3/8	35	33 1/8	26 3/4	30 3/4

