

## VRF Indoor

### Indoor VRF SYSTEM FEATURES

- \* Strong And Balanced Airflow
- \* Ultra-Low Noise Operation
- \* Intelligent Drainage
- \* DC inverter Motor
- \* Protection Function



Specifications		Model Name
Unit Type		TVRF-IE4WC30KHP
Cooling Capacity	Btu/h	30,000
Heating Capacity	Btu/h	34,000
External Dimensions (WxHxD)	In.	33-1/8 x 33-1/8 x 12-5/8
	mm	841.3 x 841.3 x 320.6
Net Weight	Lbs. / Kg	72/32.5
Electrical Power Requirements	Voltage, Phase, Hertz	208/230V, 1-phase, 60HZ
Power Cooling Consumption	kW	0.098
Power Heating Consumption	kW	0.098
Current Cooling	A	0.8
Current Heating	A	0.8
Minimum Circuit Ampacity (MCA)	A	1
Max. Overcurrent Protection (MOCP) Fuse	A	15
Refrigerant Piping Dimensions (In./mm)	Liquid (High Pressure)	3/8 - 9.52
	Gas (Low Pressure)	5/8 - 15.9
Sound Pressure Level	dB(A)	40/38/35
<b>Fan</b>		
Type x Quantity		Centrifugal×1
Airflow Rate	CFM	885/800/650
<b>Motor</b>		
Motor Type x Quantity		BLDC×1
Motor Output	kW	0.075
Refrigerant		R410A
Coil Type		Fenestrate plain film --hydrophilic film
Unit Color		Silver


Job Name:

Date:

System Reference No.:

Engineer Signature:

## Outline Dimension Diagram

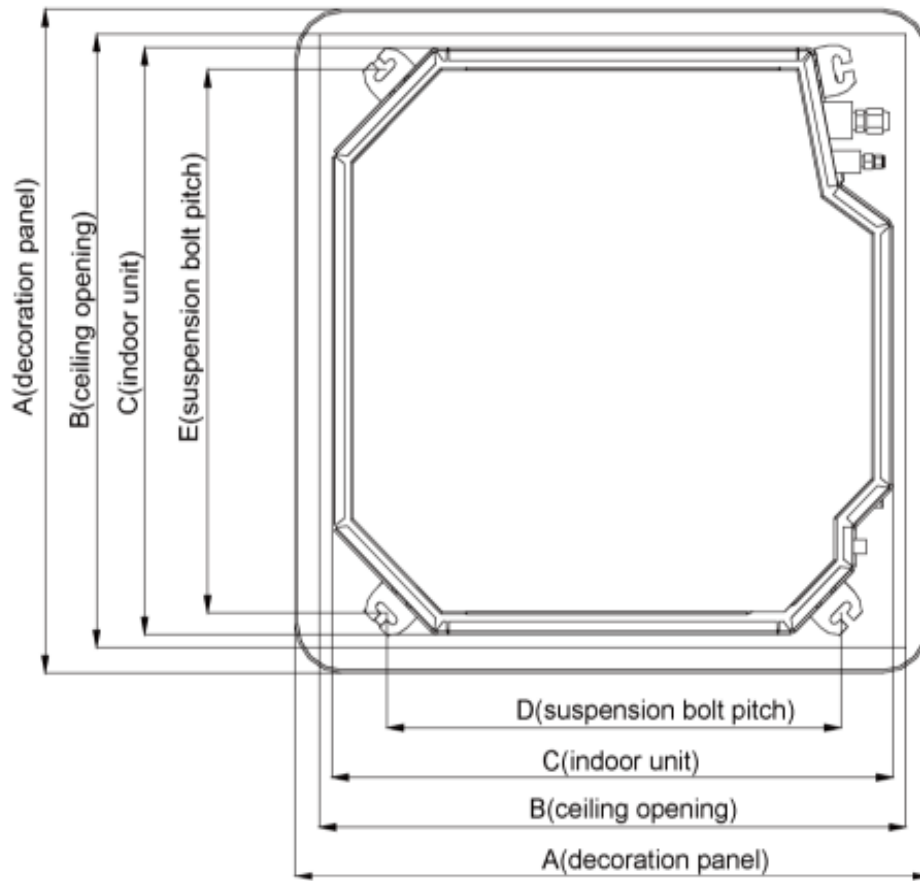

	A	B	C	D	E
mm	950	890	840	680	780
inch	37 3/8	35	33 1/8	26 3/4	30 3/4

